

## User's Manual



USER'S MANUAL FOR

# AQUA

SHOP DETECTORS

TEL : +1 206-401-9788

WEB : <https://shopdetectors.com/>

EMAIL : [contact@shopdetectors.com](mailto:contact@shopdetectors.com)



Contents .....	Page	1
Safety information .....	Page	2
Technical specification .....	Page	3
Device parts .....	Page	5
Interfaces and components of Device .....	Page	7
Overview .....	Page	8
Assembly .....	Page	10
Setup wizard .....	Page	11
Start searching .....	Page	13
Notes .....	Page	17

# Safety information



The operating in high voltage areas would limit the results and performance



The cell signal interferes with the device signal, so turn off the cell while operating



Don't operate two devices with same method of search at the same place



Don't store in high temperature or high humidity



Disconnect the batteries before long time storage



The operator Must remove any metals that might affect the operation eg: Rings, watch, belt....



Any attempt to tamper the device or unapproved maintenance would void the warranty



For best power endurance and reliability. use heavy duty and high quality batteries that works for the devices which works on removable batteries



- ❖ The user must practice before starting the detecting operations and discoveries
- ❖ Store in Cool and dry place 15-40 C 5%-75% humidity



Read & Understand  
The User's manual  
before using this device


## Technical specification

Search system :	long distance sensing system (LDS)
Search principle:	Digital Frequency Signal Processing (DFSP) / To Receiving Electrostatic Fields of the targets
Operating processor:	MICROCONTLLER PIC18
Operating frequency:	From 1 kHz to 9 kHz
Power:	4 AAA batteries 1.5 volts / Equivalent of -6volt interchangeable
Power consumption:	Maximum of consumption 25 mAh
Battery life:	32 work hours
Charger:	none
Display Type:	LEDs Interface
Specialized to detects:	Natural water – salty water – mineral water – all types of water.
Targets Discrimination:	Yes
Target Selection System:	Yes, can choose the target type before the start search
Depth Search:	200m, With controlling system in the depth level
Distance Search:	200m, With controlling system in the distance level
Results feedback:	Through orientation toward to the target location accompanied by acoustic Alerts
Bluetooth	none
Wireless:	none

Automatic smart guidance system:	Yes, through the Smart LDEs interface to locate the target path.
Voice alerts:	Yes
Vibrating alert:	Yes
Operating temperature:	From -15° C to 60° C
Storage temperature:	From -15° C to 40° C
Humidity:	It can be stored and work in the degree rate of air humidity of level 90%.
Weight:	Compound: 700 gr – disjointed in the bag: 1 kg
Dimensions:	16X9.5X2.5 cm
Bag dimensions:	20X15X5 cm


## Main Control Unit

The unit which is responsible for adjusting the device and setting in addition to full exploration search through this it.




## Handel Grip


Coms with the device . Used to carry the device through for the searching process, it has capability to rotation 360 degree.




## Transceiver Antennas

Antennas is responsible for transmit and receive signals and searching waves. It has a special and unique properties .



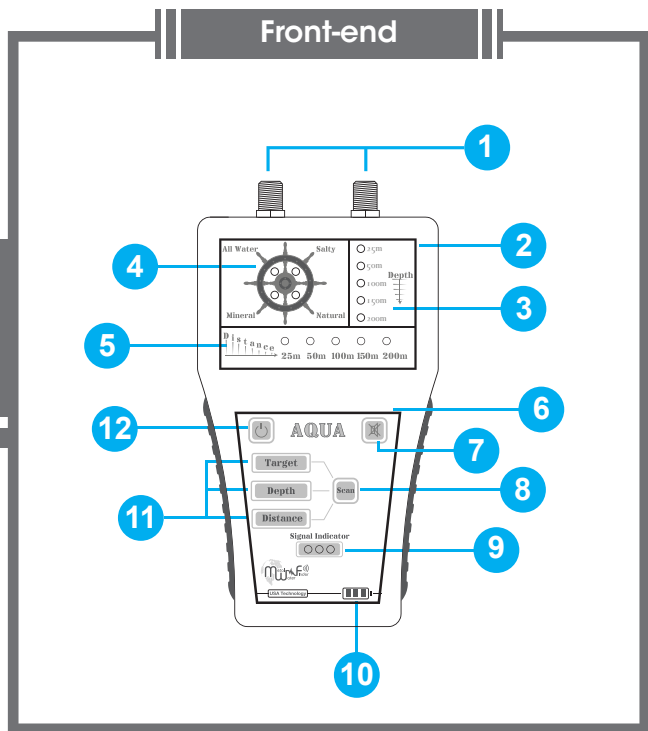

- |   |   |
|---|---|
| <b>1</b> Signal port ,connected with antennas | <b>7</b> Sound and vibration controlling button     |
| <b>2</b> User interface.                      | <b>8</b> Scan button                                |
| <b>3</b> Depth levels interface .             | <b>9</b> LED Indicators for signal.                 |
| <b>4</b> Target type interface .              | <b>10</b> Battery level indicators.                 |
| <b>5</b> Distance levels interface .          | <b>11</b> Selection keys (depth, distance & target) |
| <b>6</b> Control buttons.                     | <b>12</b> On / Off button.                          |

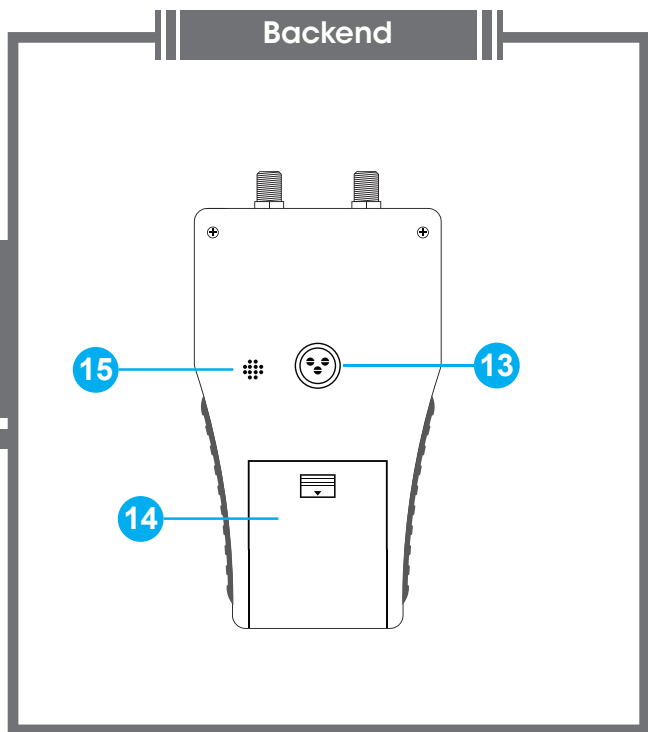

- 13** Handle socket.
- 14** Battery compartment.
- 15** Audio out.





- ❖ Aqua is working on remote sensing system (LDS) developed and compact with voice selection system to water path and point.
- ❖ The Aqua device features in high precision waves to identify and locate underground waters with high specific. Where the device can locate targets from a distance of 200 meters forward at 360 degree angle with precise control in distance search front end.
- ❖ Aqua device search depth up to 200m below the surface of the earth with strict control on deep research of device control interface the device of features a small size and ease of use. Where you can fit in your pocket and navigates it conveniently and easily any one can use it without having any experience or knowledge in the detectors.
- ❖ The principle of search depends on digital frequency signal processing (DFSP) to receive the energy of static electric field from the targets.
- ❖ Provider device automatic tuning system (ATS) to operate in all types of terrain, rocky soils, mountainous, sandy and clay.

## Overview

This electronic device works on water finder technology transmitter and receiver. It sends waves and receives at the same time, the device turn research and detection of groundwater by revealing waters partial frequency, and energy electro-static (static electricity) around in the water , make up groundwater stored and surrounding soil and are gaining in the underground streams and areas of static electricity gained from the soil through the soil influenced by different currents such as power stations, broadcasting stations, radio, satellite, lightning, and a lot of generated objects of electric power , energy static.

This device, however, depends on detection of groundwater in the ground through the influence of waves emerging from the device by electrostatic fields formed on the water as a result he was underground and water frequency at the same time. Device waves working device waves to inflate the size of these fields and escalation to the surface of the soil , which helps the device to locate the water from long distance, the device receives a signal amplification and heading toward the water site directly and precise destination.

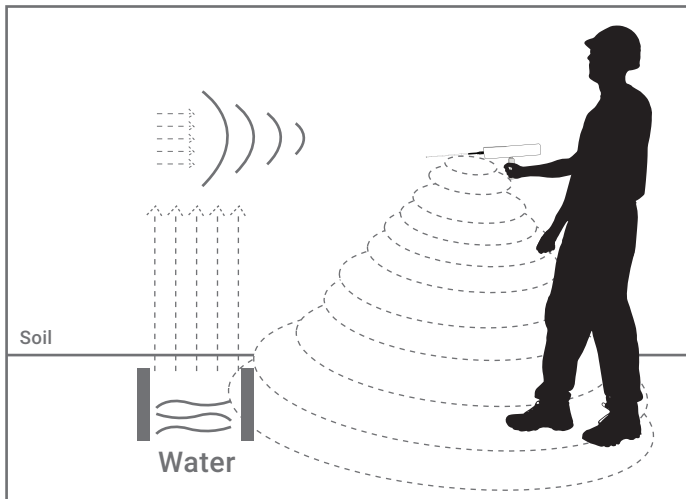

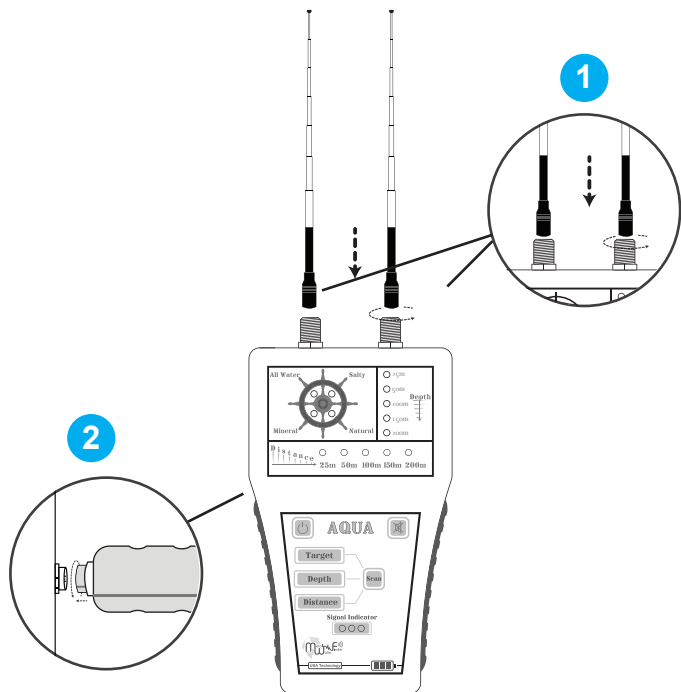


- 1 Connect the antennas in their places in front of the front part of the device as shown in the drawing.
- 2 Connect the carrier handle in its place at the bottom of the machine as shown in the drawing.

## Characteristics and functionality

- ❖ To turn on the device press and hold the power key (for seconds) and for shut down process we do the same way.
- ❖ To control the audio levels through the key sound and pressure intermittently on the key to change the level.



**Note:** audio has five position in addition to silent mode and also there are several voice functions (voices of the keys and press – search alerts sounds).

- ❖ The device is equipped with vibrating alert feature, you can control turn and stop vibrating alerts through press and hold (for three second) on key sound.
- ❖ The device works on four batteries (1.5 AAA volts) subject to change after its completion.
- ❖ Battery level indicators are totally full where the battery is full and have three levels with different color landing descending (green, yellow, and red) and before the entry into force of the energy of the battery starts flashing red.

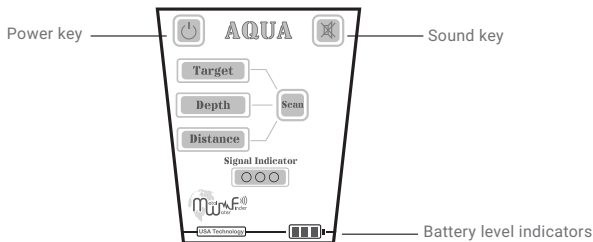


## Search settings


- ❖ Turn on device through turn and close key.
- ❖ Choose the desired water type by pressing the target key and you will notice the change in optical indicators that special for target part at the top of device each target there is a special light and goals (Natural water ,salty water , mineral water and all types of water ).
- ❖ Choose the level of depth by pressing depth key and you will notice the change in levels and depths interface there are several level and is (25m, 50m, 100m, 150m and 200m )
- ❖ Choose the level of required distance to search by pressing on distance key and you will notice the change in levels in the interface distances and there are several levels and is (200m, 150m, 50m and 25m).
- ❖ Press the scan key to start the research process and you will notice the optical indicators started working and audio alarm started and this refer to device ready to start searching process.

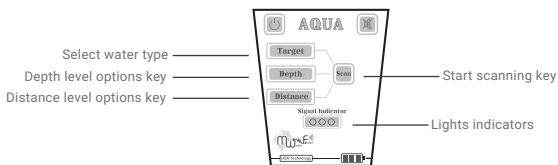

- ❖ The user must carry the device through the carrier handle so the device is horizontal with the ground and tilted slightly toward the soil as shown in the drawing.

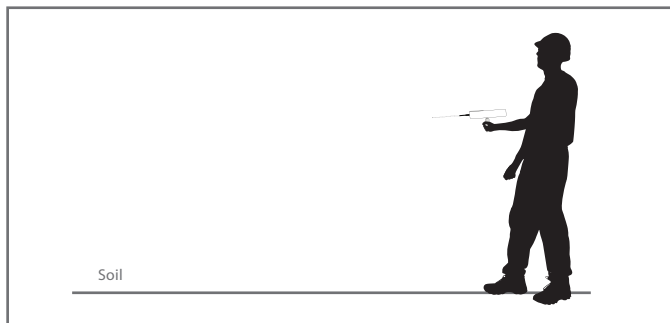


- ❖ And then just do the stimulation for waves and area outside of the device and we move the device by hand turn right and then left slowly and then install the hand that the device.

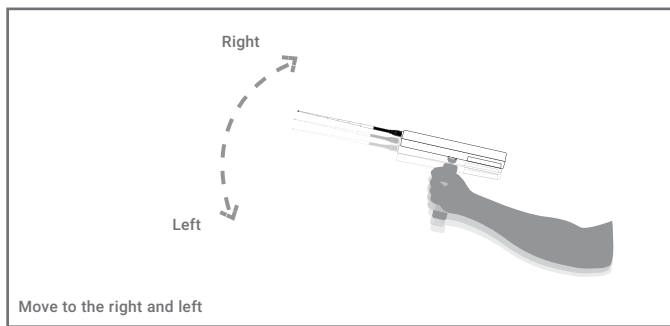

If you find the water that was determined search for it. The device will receive this read and signal and thus change the device path automatically from normal path that was stable in it to another path and this trend is toward water location. And then installs the device in the same direction. At the mean time we do clearing water location and install starts to launch audio alarm toward water location then we warp completely about the direction in which the device went to him to face adverse parking to note change device path at another time and toward to water location and launching audio alarm constantly.

Then we get away from first reading point to stand at another location away from the first 10 meters sideways then do the process of stimulation device waves again and prove the device and wait for reading if the water was downright the device will go towards the site itself and we have made sure that there was water and could we do that way more than once to validate the water direction by taking more than the reading of device from different points. And if we notice theories to all our readings that we have made intersect in one point location and water point.




The user can know and estimate water distance from starting point search and to do that we change the distance level by pressing on distance key then we select distance from a list of distance for example if we have chosen at the beginning of search 200 search distance meters we reduce the distance of 50 meters then press on key scan again and the device starts to search and make previous steps. At this time hold the device and wait to read if we have received target read we have known that target walks away from search point is 50 meters. It is also possible restoring these settings again and reduce the distance less to estimate target distance bitterly and then move on to the stage to locate the water location.

### How to locate the target

After confirmation read over to the direction of the water location we press on key scan for installation and confirm the water location and we will notice that the device beep towards water then we are walking in the same direction and in the normal way to carry device to get point beyond the water location and we will notice that the device has changed its direction from normal track to warp back to the location and existence of the target point here we also spin with the device to target location and walk slowly when we were above the water directly we will notice the device will start to rotate left or right and this shows that we have identified the water point presence.



**Note:** When you begin the process of tracking for water location you will notice the device produce alerts and a acoustic signals toward water location but if you notice that you are go out from derailing and direction of water this sound will disappear and another sound is heard indicating the error mode. And will light up one of the light optical indicators right or left to indicate the correct path that will track it and to reach the water.

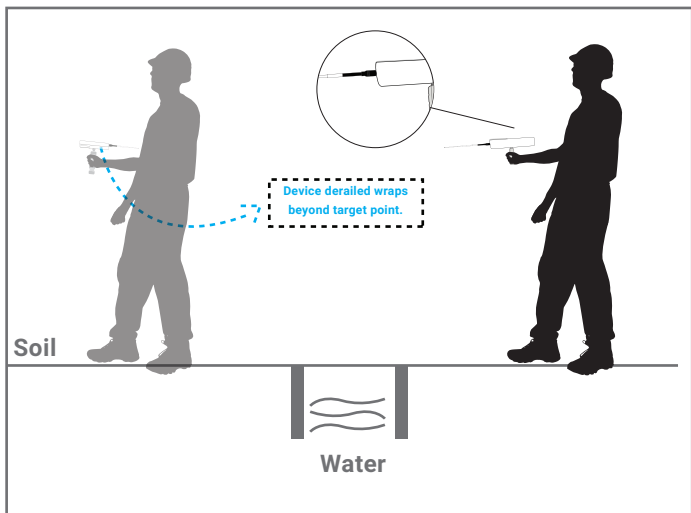

A series of 25 horizontal dotted lines for writing notes.

## SHOP DETECTORS

TEL : +1 206-401-9788

WEB : <https://shopdetectors.com/>

EMAIL : [contact@shopdetectors.com](mailto:contact@shopdetectors.com)

United States of America - illinois

[www.mwf-usa.com](http://www.mwf-usa.com)  
[info@mwf-usa.com](mailto:info@mwf-usa.com)  
+1 ( 708 ) 364 9602

Turkey - istanbul

[www.mwf-metaldetectors.com](http://www.mwf-metaldetectors.com)  
[info@mwf-metaldetectors.com](mailto:info@mwf-metaldetectors.com)  
+90 ( 212 ) 222 0946  
+90 ( 212 ) 222 0947

